



SUNSHADE #79319

PARTS LIST – ASSEMBLY INSTRUCTIONS

IMPORTANT

READ THIS MANUAL CAREFULLY AND KEEP FOR FUTURE REFERENCE

CAUTION

REMOVE THE SUNSHADE FOR TRANSPORT IN AN OPEN TRUCK OR TRAILER

! WARNING!

THIS SUNSHADE WILL NOT PROTECT OPERATOR FROM INJURIES CAUSED BY ROLLOVER, COLLISION, OR OTHER ACCIDENTS

Carton Contents for Sunshade #79319

PART #	KEY #	QTY.	DESCRIPTION
30373	1	1	RECEIVER, RH
30374	2	1	RECEIVER, LH
30289	3	1	FRONT BOW
30290	4	1	TOP BOW
30067	5	1	REAR BOW
30288	6	2	POST
30291	7	1	BRACE, RH
30292	8	1	BRACE, LH
30293W	9	1	VINYL COVER
30228		1	REAR SCREEN PANEL
30375		1	HARDWARE PACKAGE (Contents Listed Below)
786		8	1/4"-20 x 5/8" Cap Screw
926		2	1/4"-20 x 1" Cap Screw
2186		2	1/4"-20 x 1 1/4" Cap Screw
730		12	1/4"-20 Two Way Lock Nut
1514		2	1/4" Flat Washer
784		2	5/16"-18 x 3/4" Cap Screw
7		2	5/16" Lock Washer
60246		2	5/16" Fender Washer



WARNING



1. This sunshade is designed to provide sun protection only. It does not provide protection from noise, exhaust fumes, chemicals or injury from collision, rollover or other accidents.
2. Do not operate machine in confined areas without proper ventilation.
3. Thoroughly check area of operation before using machine.
4. The sunshade adds height to the machine. Low tree limbs and other overhead structures that did not interfere with the operation of the machine before may now be obstacles. Remove the sunshade to drive under low objects.

MAINTENANCE INSTRUCTIONS

Periodically check all bolts to see that they are tight. If bolts become loose, failure of sunshade parts may occur.

Step 1; See Figure 1A, 1B, 1C:
Install right and left Receivers (1 & 2).

A. Hold the right receiver in position between the frame and axle bracket at the rear of the slot as shown. Insert a 5/16" x 3/4" bolt with lock washer and fender washer through the slot in the axle mount. Then thread the bolt into the weld nut in the Receiver tab at Reference A. Do not tighten.

B. Use a #25 Torx ® driver to remove the screw at Reference B.

C. Slide the Receiver forward in the slot and place the tab between the holes at Reference B. Replace the screw. Tighten all screws and bolts. **Do not over tighten the Torx ® screw.**

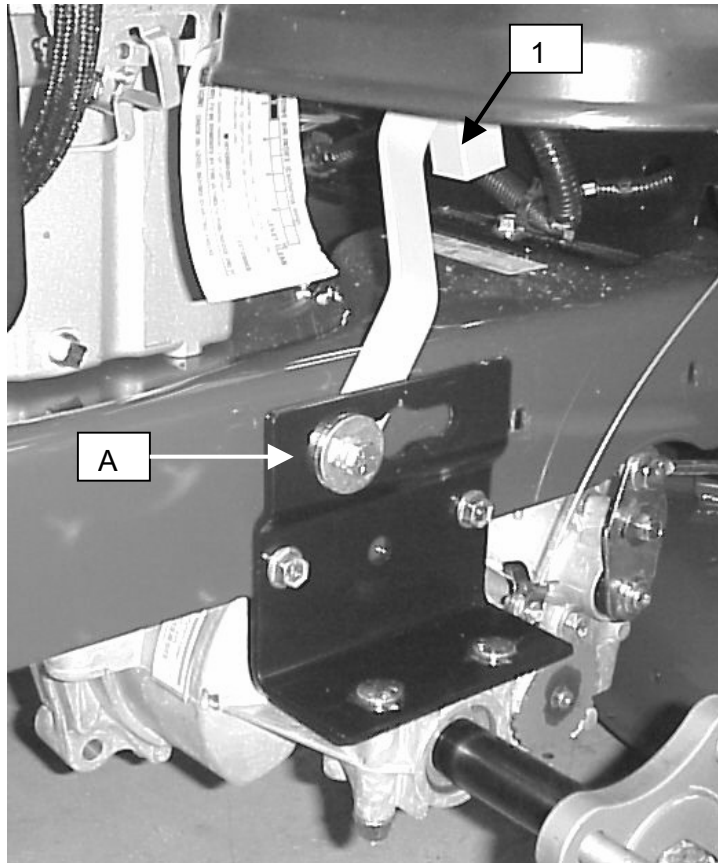


Figure 1A

NOTE: The right rear wheel is removed in the photo for clarity. Is not necessary to remove the wheel for installation.

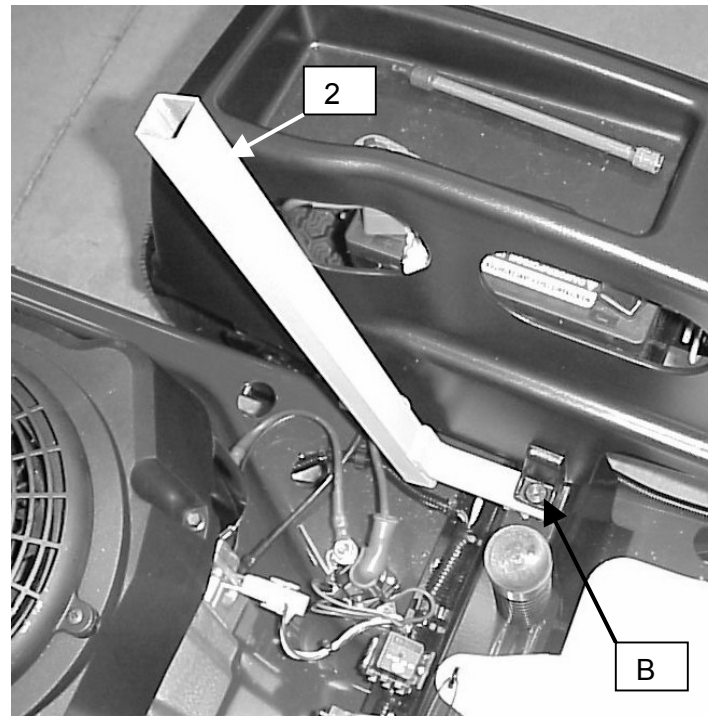


Figure 1B

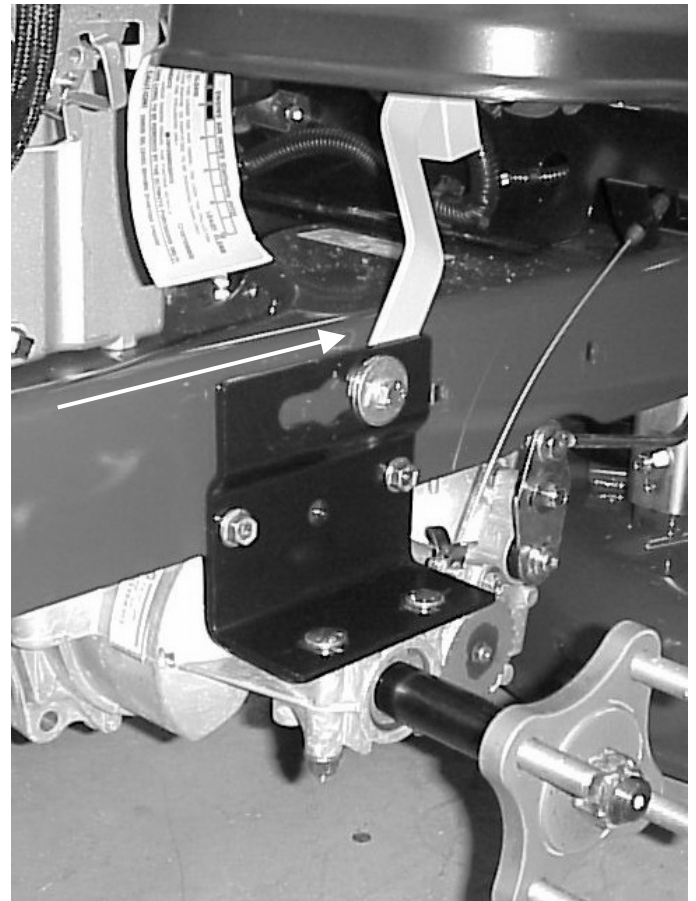


Figure 1C

Step 2; See Figure2:

Assemble the upper frame. Use bolt sizes as indicated in the Figures.

A. Lay the Front Bow (3) and Rear Bow (5) on a flat surface. Place the ends of the front bow on the outside of the ends of the rear bow. Insert four bolts outwards through the ends of the bows. Place the ends of the Top Bow (4) over the two forward bolts of the assembly. Add locknuts and tighten keeping the top of the Top Bow leaning about 4" forward of vertical.

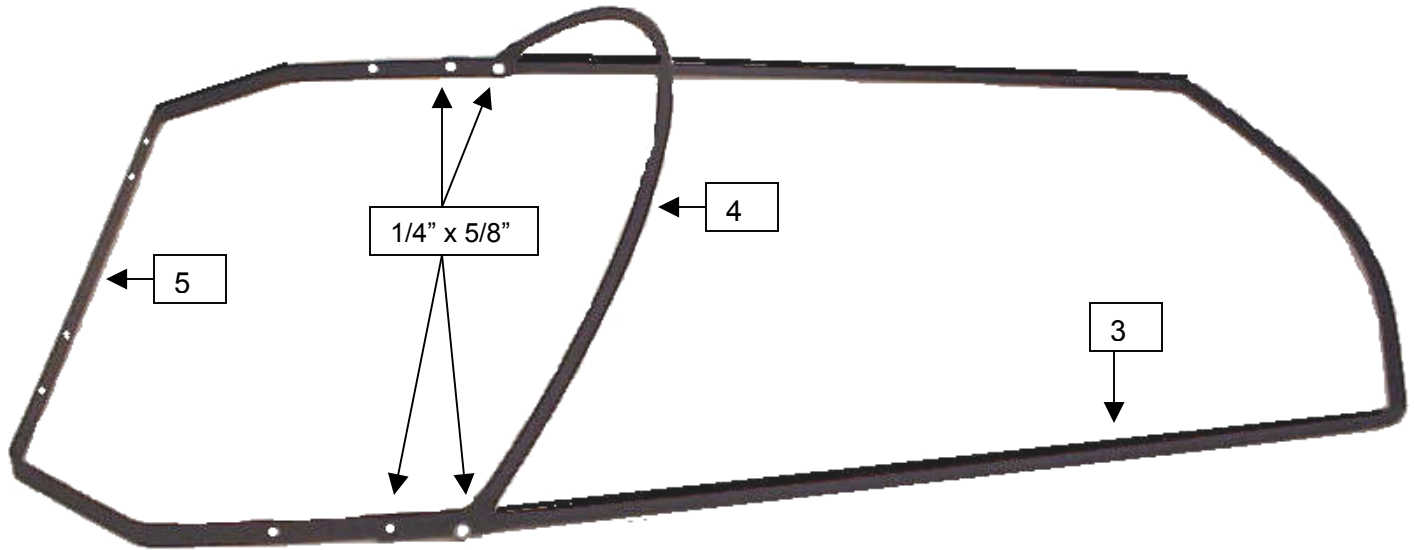


Figure 2

Step 3; See Figure 3:

Attach Posts (6) and right and left Braces (7&8).

A. Turn the frame over and refer to the illustration to attach the Posts (6) and Braces (7&8) to the assembled frame with bolts as noted. Do not tighten the bolts at this time.

B. Insert the square ends of the posts into the receivers on the machine. Tighten all bolts from previous steps while keeping the upper framework level.

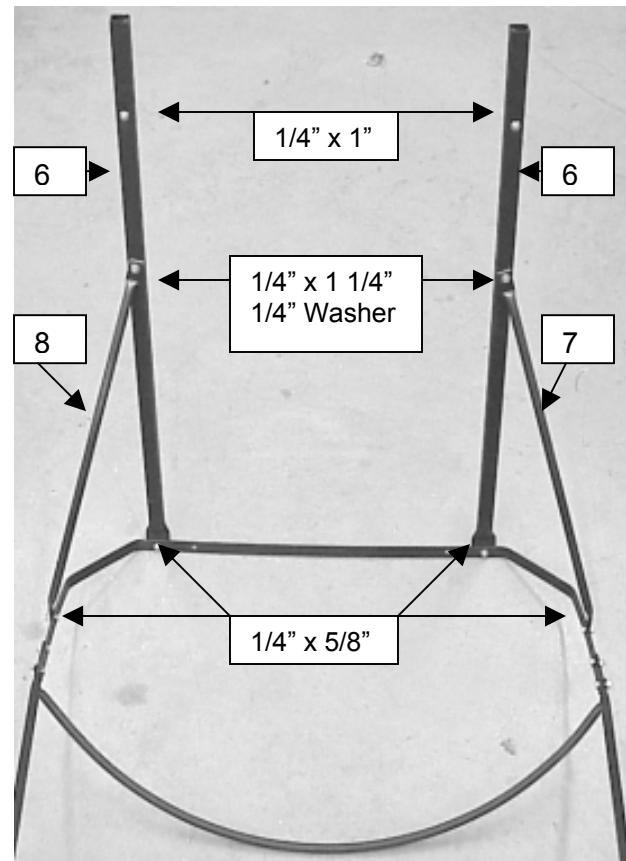


Figure 3

NOTE: Apply some wax to the square ends of the posts to ease insertion and removal of the Sunshade from the receivers.

IMPORTANT: Remove the sunshade before transport in an open truck or trailer.

Step 4; See Figure 4A, 4B:

A. Snap the Rear Screen Panel in place as shown then install vinyl cover. Secure the bottom with the Velcro® fastener.

B. Slip the front of the Vinyl Cover over the front bow. Pull the rear of the cover down over the rear bow. Push the center bow up to tighten the cover if needed.



Figure 4A

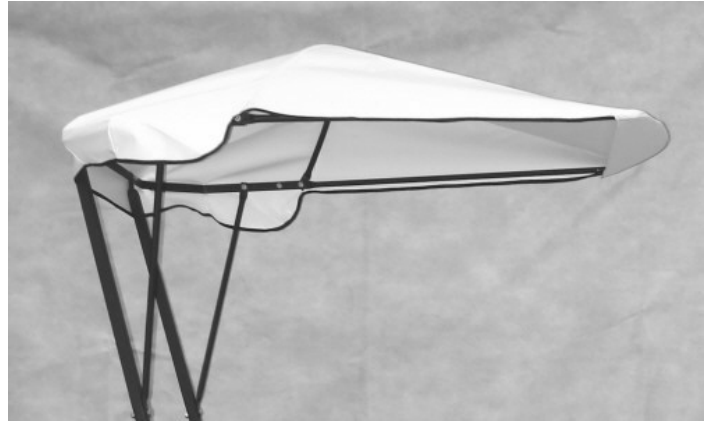


Figure 4B



For Replacement Parts and Accessories Contact:

Original Tractor Cab Co., Inc.

P.O. Box 97 6849 W. Front St.

Arlington, IN 46104

Phone 765-663-2214

Fax 765-663-2101

Email Sales@originalcab.com

Visit us on the web to see our other products.

www.originalcab.com

Cabs for Lawn Tractors, Garden Tractors, Compact Tractors, Snow Blowers, Utility Vehicles

Sunshades for Tractors, Mowers, & Utility Vehicles

Storage Covers for Lawn and Garden equipment.

LIMITED WARRANTY

COVERED BY WARRANTY

ORIGINAL TRACTOR CAB CO., INC., (the "Company") warrants to the owner that each new product listed below is merchantable and free of defects in workmanship and material.

During the warranty period, the dealer from whom the product was bought, or the Company, will provide, free of charge, parts and the shipping costs of parts necessary to correct any defect in workmanship and material.

WARRANTY PERIOD

The company products listed below are warranted for the stated period from the date of the original purchase:

- | | |
|--|--------|
| 1. Cabs for tractors and snow removal equipment | 1 year |
| 2. Company manufactured accessories for above cabs | 1 year |
| 3. Sunshades for lawn and garden tractors | 1 year |
| 4. Repair parts | 1 year |

OWNER'S RESPONSIBILITIES

The owner of a new Company manufactured product must do the following to qualify for warranty service:

1. Retain the original invoice or other proof of purchase to avoid unnecessary difficulties in determining eligibility for warranty work.
2. Notify the dealer from whom the product was bought, or the company, as soon as possible after discovery of a possible defect, and provide proof of original purchase.

To notify the company, write to: Original Tractor Cab Co., Inc., P.O. Box 97, Arlington, IN 46104.

3. The owner may, upon notification by the Company, be required to return the defective part, or parts, to the Company for inspection and warranty service.

NOT COVERED BY WARRANTY

The following are not covered by this warranty:

1. Transportation charges to and from servicing dealer or the Company;
2. New products that have been subject to misuse, negligence or accident, or have been altered or repaired in a manner not authorized by the company;
3. Windshield wipers, lights, or accessories that are warranted separately by their respective manufacturers, except Company agrees to make available to the owner whatever warranty benefits may be made available to the Company by the manufacturers.

All implied warranties, except to the extent prohibited by any applicable law, shall have no greater duration than the warranty period for the applicable product, some states do not allow limitation on how long an implied warranty lasts, so the above limitation may not apply to you.

The Company's' liability arising out of warranties representation, instructions, or defects from any abuse, shall be limited exclusively to repair or replacing parts under the condition in the warranty, and in no event will Company be liable for incidental or consequential damages. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

This warranty gives you specific legal rights, and you may also have rights that vary from state to state.