



SUNSHADE #30400 For:

Tractors and Mowers

with two post ROPS That are 2" x 2" or 2" x 3" square tube and no more than 34" wide.

Jumbo Size ROPS attached Sunshade

PARTS LIST – ASSEMBLY INSTRUCTIONS

IMPORTANT

READ THIS MANUAL CAREFULLY AND KEEP FOR FUTURE REFERENCE

CAUTION

REMOVE THE SUNSHADE FOR TRANSPORT IN AN OPEN TRUCK OR TRAILER

! WARNING!

**THIS SUNSHADE WILL NOT PROTECT OPERATOR FROM INJURIES CAUSED BY COLLISION,
OR OTHER ACCIDENTS**

Carton Contents: SUNSHADE MODEL # 30400

Part #	Qty.	Description
30401	2	Receiver
30402	1	Bracket
30403	1	Front Frame
30404	1	Rear Frame
30405	2	Frame Extension
30406-W	1	Vinyl Cover
30407	1	Hardware Package (contents listed below)
908	4	1/4"-20 x 1 1/2" Cap Screw
5144	2	1/4"-20 x 2 3/4" Cap Screw
1514	4	1/4" Flat Washer
730	6	1/4"-20 Two-Way Locknut
4411	4	3/4" U-clamp
30409	4	1/2" O.D. x 11/16" long Spacer
9998	2	5/16"-18 x 3/4" Hand Knob

IMPORTANT!

Read these instructions completely before beginning installation.

Step 1; See Figure 1:

Assemble Frame

A. Assemble the frame as shown. Make sure that the ends of the extensions are inserted completely into the other parts.

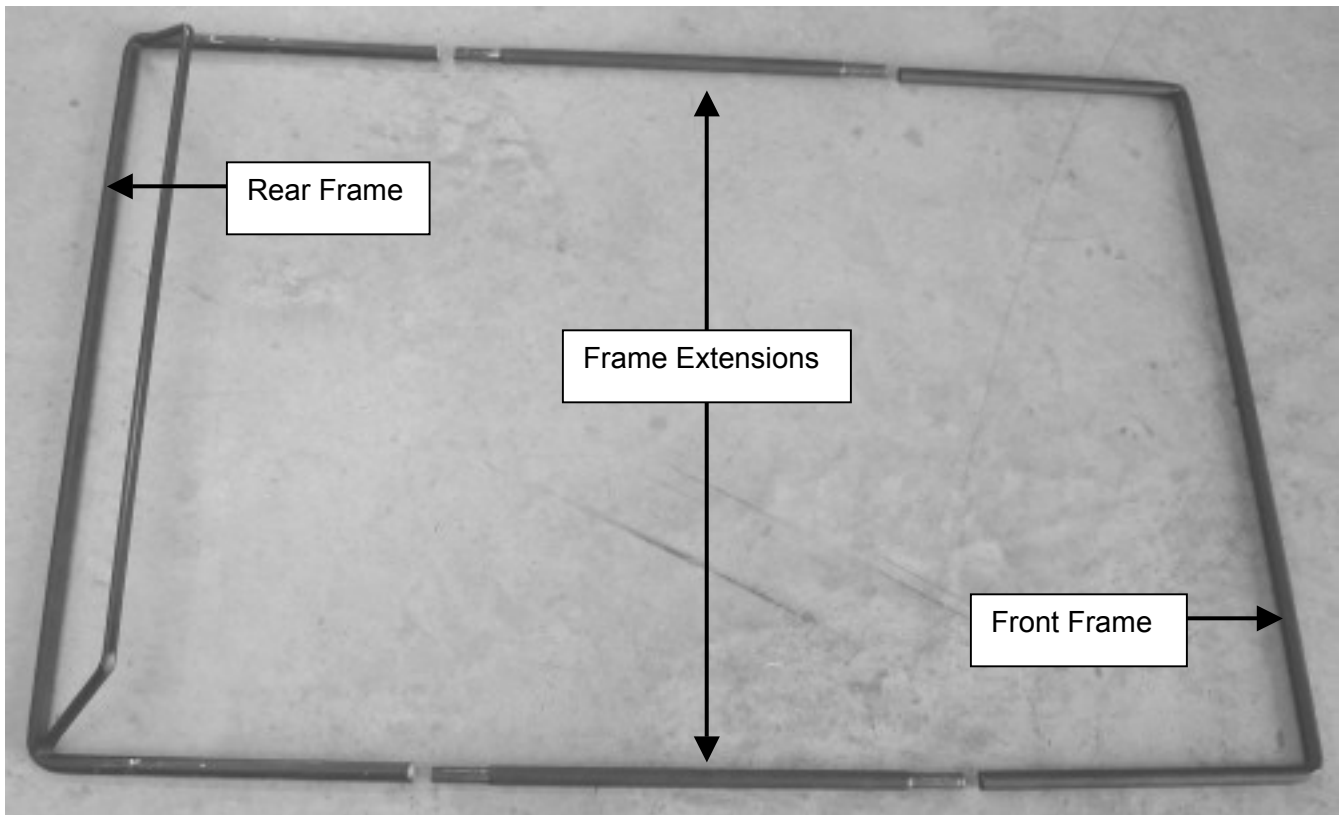


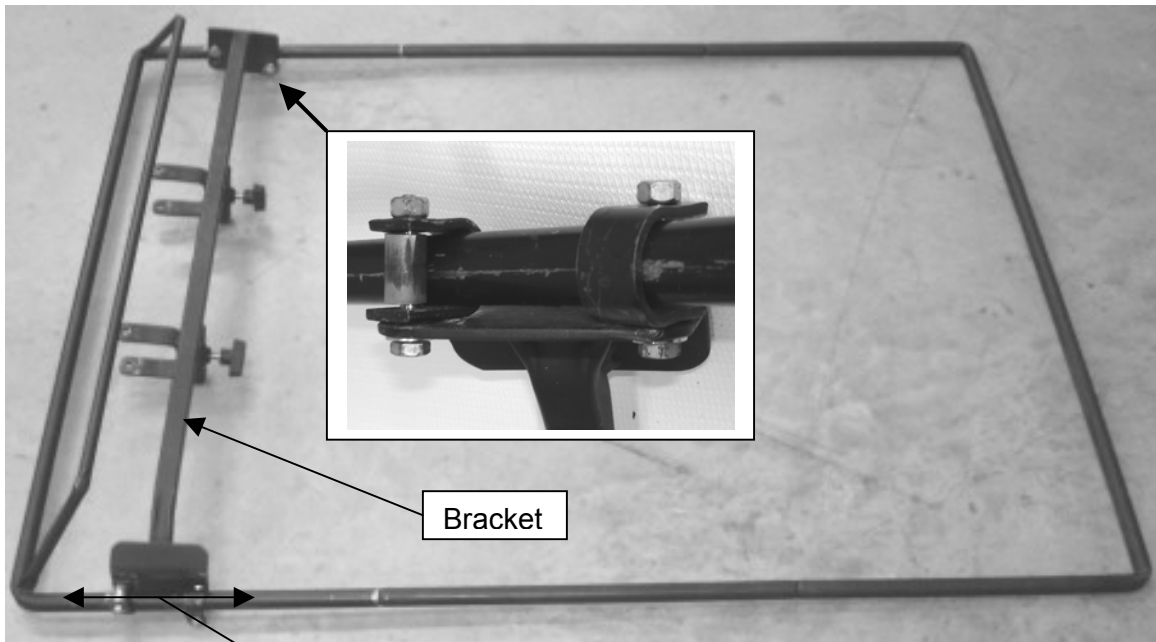
Figure 1

Step 2: See Figure 2:

Install Bracket

A. Attach the Bracket to the assembled frame as shown. Use two 1/4" x 1 1/2" bolts with 1/4" flat washers inserted outward through the slots. Place the U-clamps over the frame tube. Insert the bolts through one leg of the U-clamp, the spacer and then the other leg of the U-clamp (see inset). Add 1/4" locknuts do not tighten at this time.

Note: U-clamps may be placed on the tube one up and one down to accommodate ROPS with more extreme angles if needed.

**Figure 2**

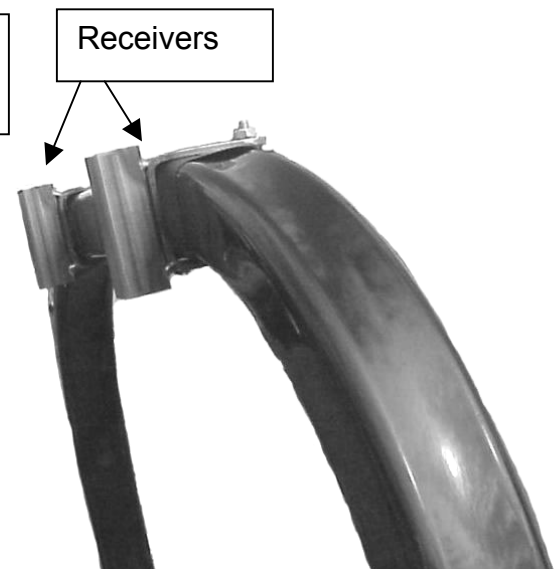
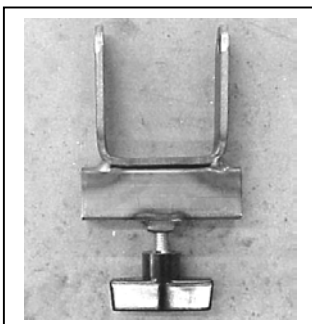
Bracket can be adjusted forward and rearward on frame tubes as needed for best shade location.

Step 3; See Figure 3:

Install Receivers

A. Place the receivers on the ROPS centered and about 10" apart. Insert 1/4" x 2 3/4" bolts upwards and add locknuts. Do not tighten at this time.

B. Thread the hand knobs into weld nuts on the receivers.

**Figure 3**

NOTE: The square tubes of the Receivers can be clamped on in front of or behind the ROPS to gain forward or rearward shade location as needed.

Step 3; See Figure 3:

Install and adjust Frame, Install Cover

A. Insert the Bracket into the Receivers and tighten the receiver bolts. Adjust the frame front to back by sliding the frame in the U-clamp as needed for optimum shade. Hold the frame level and tighten the Bracket to frame bolts. Tighten the hand knobs securely.

B. Slip the front of the Vinyl Cover over the Front Frame. Pull the flap of the cover over the rear frame and secure it with the hook and loop fastener.



ORIGINAL
TRACTOR CABS
FIRST IN WEATHER PROTECTION



For Replacement Parts and Accessories Contact:

Original Tractor Cab Co., Inc.

P.O. Box 97 6849 W. Front St.

Arlington, IN 46104

Phone 765-663-2214

Fax 765-663-2101

Email Sales@originalcab.com

Visit us on the web to see our other products.

www.originalcab.com

Cabs for Lawn Tractors, Garden Tractors, Compact Tractors, Snow Blowers, Utility Vehicles

Sunshades for Tractors, Mowers, & Utility Vehicles

Storage Covers for Lawn and Garden equipment.

LIMITED WARRANTY SNOW REMOVAL EQUIPMENT CABS

COVERED BY WARRANTY

ORIGINAL TRACTOR CAB CO., INC., (the "Company") warrants to the owner that each new product listed below is merchantable and free of defects in workmanship and material.

During the warranty period, the dealer from whom the product was bought, or the Company, will provide, free of charge, parts and the shipping costs of parts necessary to correct any defect in workmanship and material.

WARRANTY PERIOD

The company products listed below are warranted for the stated period from the date of the original purchase:

- | | |
|--|--------|
| 1. Cabs for tractors and snow removal equipment | 1 Year |
| 2. Company manufactured accessories for above cabs | 1 Year |
| 3. Sunshades for lawn and garden tractors | 1 Year |
| 4. Repair parts | 1 Year |

OWNER'S RESPONSIBILITIES

The owner of a new Company manufactured product must do the following to qualify for warranty service :

1. Retain the original invoice or other proof of purchase to avoid unnecessary difficulties in determining eligibility for warranty work.
2. Notify the dealer from whom the product was bought, or the company, as soon as possible after discovery of a possible defect, and provide proof of original purchase.

To notify the company write to: Original Tractor Cab Co., Inc., P.O. Box 97, Arlington, IN 46104.

3. the owner may , upon notification by the Company, be required to return the defective part, or parts, to the Company for inspection and warranty service.

NOT COVERED BY WARRANTY

The following are not covered by this warranty:

1. Transportation charges to and from servicing dealer or the Company;
2. New products which have been subject to misuse, negligence or accident, or have been altered or repaired in a manner not authorized by the company;
3. Windshield wipers, lights, or accessories that are warranted separately by their respective manufacturers, except Company agrees to make available to the owner whatever warranty benefits may be made available to the Company by the manufacturers.

All implied warranties, except to the extent prohibited by any applicable law, shall have no greater duration than the warranty period for the applicable product, some states do not allow limitation on how long an implied warranty lasts, so the above limitation may not apply to you.

The Companys' liability arising out of warranties representation, instructions, or defects from any abuse, shall be limited exclusively to repair or replacing parts under the condition in the warranty, and in no event will Company be liable for incidental or consequential damages. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

This warranty gives you specific legal rights, and you may also have rights that vary from state to state.