



SunShade #9565 for John Deere Standard, High Performance, & Electric Gator Utility Vehicle

OPERATION - PARTS LIST - ASSEMBLY

IMPORTANT

READ THIS MANUAL CAREFULLY AND KEEP FOR FUTURE REFERENCE

CAUTION

REMOVE THE VINYL COVER OR THE COMPLETE SUNSHADE FOR TRANSPORT IN AN OPEN TRUCK OR TRAILER

! WARNING

THIS SUNSHADE WILL NOT PROTECT OPERATOR FROM INJURIES CAUSED BY ROLLOVER, COLLISION, OR OTHER ACCIDENTS

Carton Contents: Sunshade #9565 for John Deere Gator

Key#	Part#	Qty.	
1	9563	1	Front Bow A
2	9564	1	Front Bow B
3	9566	1	Top Bow A
4	9567	1	Top Bow B
5	9568	2	Rear Bow 1/2
6	30249	2	Post
7	9571	1	Brace, right
8	9572	1	Brace, left
9	9573	1	Receiver, right
10	9574	1	Receiver, left
11	9575-Y	1	Vinyl Cover
	9576	1	Hardware Package (contents listed below)
	2186	2	1/4"-20 x 1 1/4" Cap Screw
	786	13	1/4"-20 x 5/8" Cap Screw
	1514	2	1/4" Flat Washer
	730	15	1/4"-20 Two Way Locknut

Step 1; See Figure 1:

Install Receivers, right (9) & left (10)

A. Remove the two front bolts on each side of the cargo box.

Note: To determine right from left the receivers should lean slightly forward when installed.

B. Place the right Receiver over the holes. Replace the bolts and tighten.

C. Repeat the above step on the opposite side.

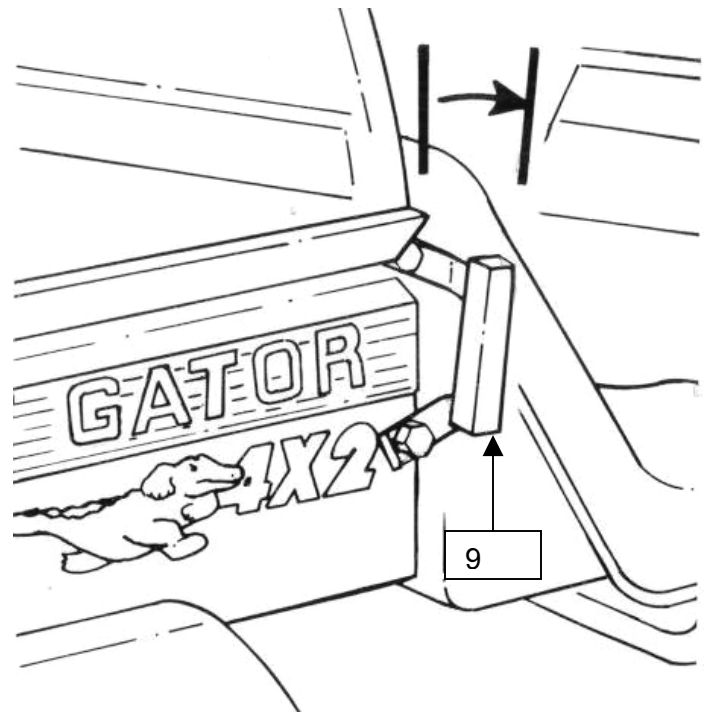


Figure 1


Step 2; See Figure 2:

Assemble Frame. Use 1/4" x 5/8" bolts and 1/4" locknuts unless specified otherwise.

A. Lay Front Bow A (1) and Front Bow B (2) on a flat surface. Insert two bolts forward through the holes in the short (23 3/4") leg of the "L". Add locknuts and tighten the bolts. Repeat this step for the Top Bow A (3) and B (4). Bolt the Rear Bow 1/2s (5) together.

B. Place the ends of the Front Bow on the outside of the ends of the Rear Bow. Insert four bolts outwards through the four holes in the ends of the bows. Place the ends of the assembled Top Bow over the two forward bolts that connect the Front and Rear Bows. Add four locknuts and tighten keeping the Top Bow tilted about 4" forward of vertical.

C. Refer to Figure 2 to attach the Posts, 6 and the Brace, right (7) and left (8) to the assembled framework. The bolts for the posts should point outwards while the bolts for the braces should point inwards. Use 1/4" x 1 1/4" bolts with flat washers inserted inwards to fasten the braces to the posts.

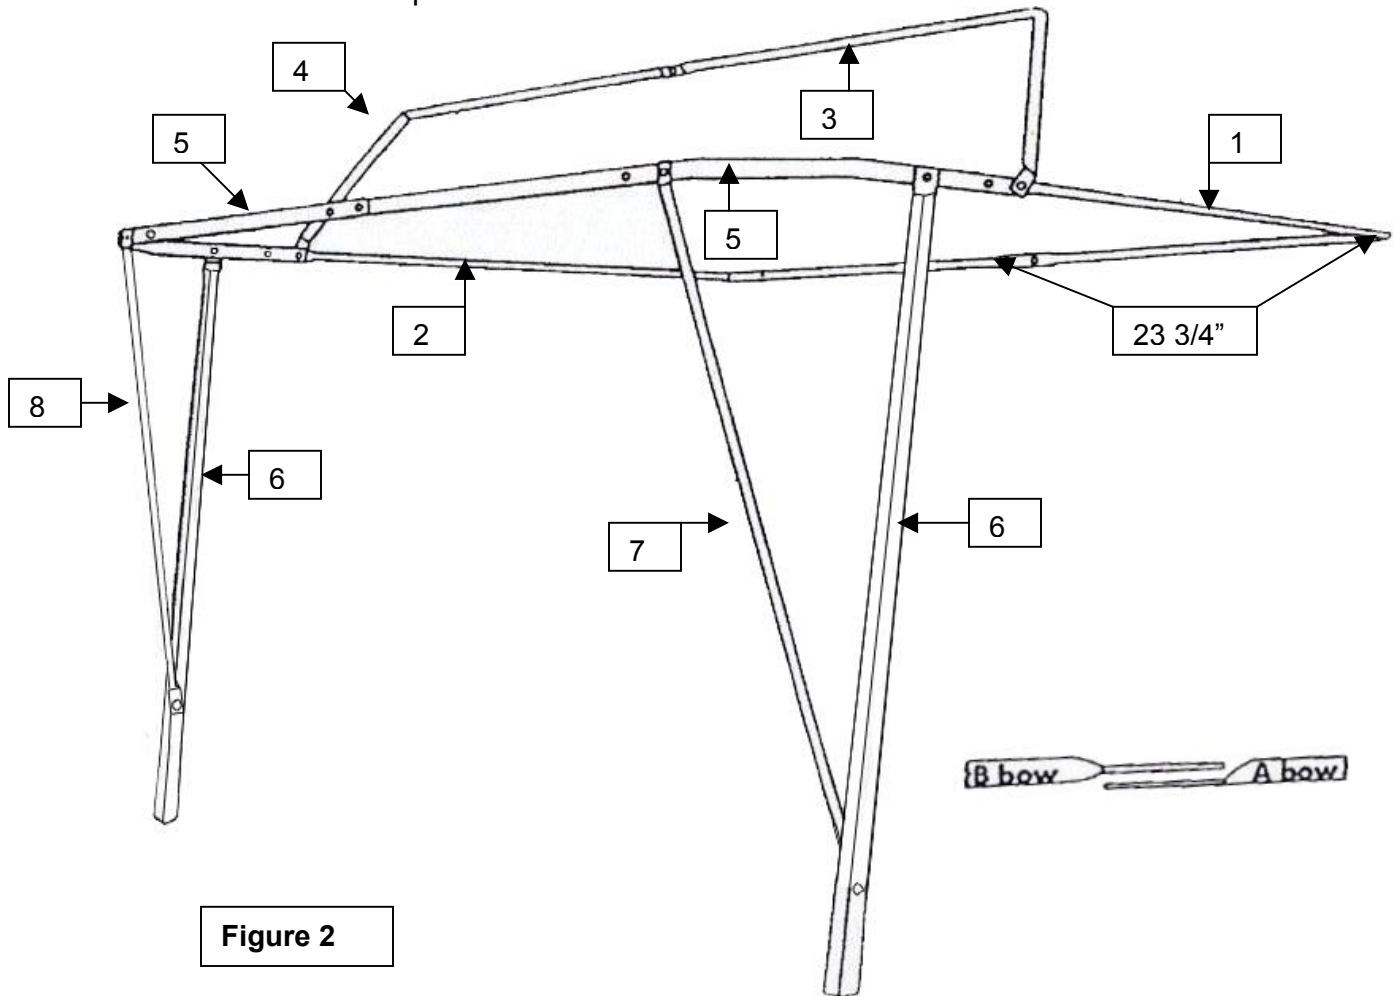

NOTE: Apply some wax or other dry lubricant to the ends of the posts to ease insertion and removal of the sunshade.

D. Insert the posts into the receivers. Hold the frame level and tighten the post and brace bolts.

E. Slip the front of the Vinyl Cover over the front bow. Pull the rear of the cover down over the rear bow. Push the top bow up to tighten the cover if needed.

Visit us on the web to see our other products.

Cabs for Lawn Tractors, Garden Tractors, Compact Tractors, Snow Blowers, Utility Vehicles, & Fork Lifts, Sun Shades for tractors, mowers & Utility Vehicles, Storage Covers for Lawn and Garden equipment.



Original Tractor Cab Co., Inc. P.O. Box 97 6849 W. Front St. Arlington, IN 46104 Phone 765-663-2214 Fax 765-663-2101 Email Sales@originalcab.com

LIMITED WARRANTY

COVERED BY WARRANTY

ORIGINAL TRACTOR CAB CO., INC., (the "Company") warrants to the owner that each new product listed below is merchantable and free of defects in workmanship and material.

During the warranty period, the dealer from whom the product was bought, or the Company, will provide, free of charge, parts and the shipping costs of parts necessary to correct any defect in workmanship and material.

WARRANTY PERIOD

The company products listed below are warranted for the stated period from the date of the original purchase:

- | | |
|--|--------|
| 1. Cabs for tractors and snow removal equipment | 1 Year |
| 2. Company manufactured accessories for above cabs | 1 Year |
| 3. Sunshades for lawn and garden tractors | 1 Year |
| 4. Repair parts | 1 Year |

OWNER'S RESPONSIBILITIES

The owner of a new Company manufactured product must do the following to qualify for warranty service:

1. Retain the original invoice or other proof of purchase to avoid unnecessary difficulties in determining eligibility for warranty work.
2. Notify the dealer from whom the product was bought, or the company, as soon as possible after discovery of a possible defect, and provide proof of original purchase.

To notify the company write to: Original Tractor Cab Co., Inc., P.O. Box 97, Arlington, IN 46104.

3. the owner may, upon notification by the Company, be required to return the defective part, or parts, to the Company for inspection and warranty service.

NOT COVERED BY WARRANTY

The following are not covered by this warranty:

1. Transportation charges to and from servicing dealer or the Company;
2. New products that have been subject to misuse, negligence or accident, or have been altered or repaired in a manner not authorized by the company;
3. Windshield wipers, lights, or accessories that are warranted separately by their respective manufacturers, except Company agrees to make available to the owner whatever warranty benefits may be made available to the Company by the manufacturers.

All implied warranties, except to the extent prohibited by any applicable law, shall have no greater duration than the warranty period for the applicable product, some states do not allow limitation on how long an implied warranty lasts, so the above limitation may not apply to you.

The Company's liability arising out of warranties representation, instructions, or defects from any abuse, shall be limited exclusively to repair or replacing parts under the condition in the warranty, and in no event will Company be liable for incidental or consequential damages. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you.

This warranty gives you specific legal rights, and you may also have rights that vary from state to state.