



#9855 12-Volt Amber Strobe Light

PARTS LIST – ASSEMBLY INSTRUCTIONS

IMPORTANT

READ THIS MANUAL CAREFULLY AND KEEP FOR FUTURE REFERENCE

#9855 12-Volt Amber Strobe Light

PART#	QTY.	KEY#	DESCRIPTION
11976	1	1	Strobe Light Assembly
12067	1	5	13' Corrugated Loom .35
11977	1		Hardware Package (contents listed below)
11748	1	2	10' black wire w/ fuse and 2 terminals
9858	1	3	26" white wire w/ 2 terminals
9851	1	4	25" black wire w/ 1 terminal
11563	1	6	Switch
9854	1	7	Switch Bracket
788	1	8	1/4"-20 x 3/4" Hex Bolt
730	1	9	1/4" – 20 Locknut
7334	3	10	#10-32 x 3/4" Phillips Screw
3619	3	11	#10-32 Kep Nut
9699	6	12	7 1/ 2" Cable Ties
9860	1	13	Closed End Connector

INSTALLATION

Step 1; See Figure 2:

Drill mounting holes.

A. Place the gasket on the rounded depression in the cab top.

B. Mark three holes for screws and the hole for the wire.

C. Drill 3/16" holes for the screws and wire.

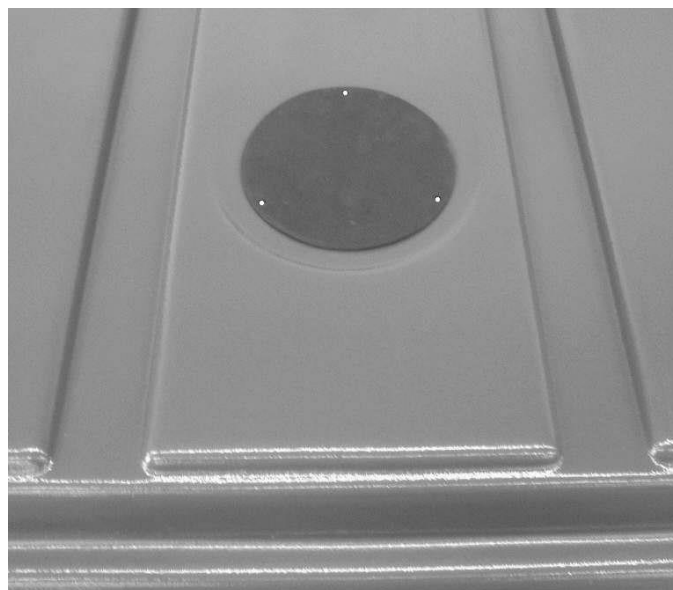


Figure 2

Step 2; See Figure 3 & 1:

Install the Strobe fixture.

A. Replace the gasket on the top. Place the light on the gasket running the wire through the holes and lining up the screw holes.

B. Secure the light to the top with the screws and nuts.

C. Use the closed end connector to fasten the red wire from the light to the 25" black wire.

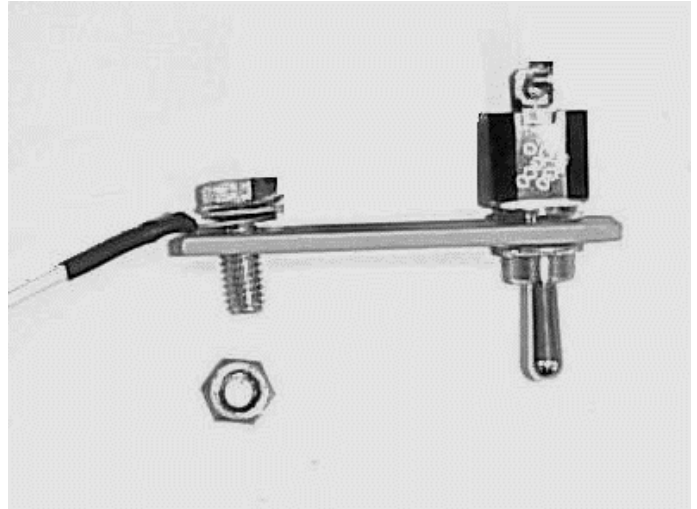


Figure 3

Step 2; See Figure 3:

Install Switch Bracket (7) and Switch (9).

- A.** Attach the Switch Bracket and the large ring on the White Wire to one of the tabs welded to the top frame of the cab with the 1/4" bolt and nut.
- B.** Connect the other end of the White Wire to the Black wire from the light.
- C.** Install the switch onto the bracket.



Step 3; See Figure 1:

Install Wires

- A.** Make the wire connections as shown in Figure 1.
- B.** Connect the other end of the 60" black wire to the positive battery terminal.
- C.** Cut a length of Loom long enough to cover the Wire. Press the wires into the split along the side. Secure in place with the cable ties provided.



CAUTION: Avoid injury! The battery produces a flammable and explosive gas. The battery may explode:

- Do not smoke near battery.
- Wear eye protection and gloves.
- Remove negative cable first when disconnecting.
- Install negative cable last when connecting.



For Replacement Parts and Accessories Contact:

Original Tractor Cab Co., Inc.

P.O. Box 97 6849 W. Front St.

Arlington, IN 46104

Phone 765-663-2214

Fax 765-663-2101

Email Sales@originalcab.com

Visit us on the web to see our other products.

www.originalcab.com

Cabs for Lawn Tractors, Garden Tractors, Compact Tractors, Snow Blowers, Utility Vehicles

Sunshades for Tractors, Mowers, & Utility Vehicles

CAB WARRANTY APPLIES TO ACCESSORIES